

CONNECTIONS AND ACCESSORIES

FOR OXYGEN THERAPY DEVICES

The flowmeters for oxygen therapy applications can be supplied completed with probes of our production for direct coupling into the terminal units.

OXYGEN PROBES WITH THREAD CONNECTION



AFNOR NF-S 90-116 probe, thread ISO G. 1/4" F.



AFNOR NF-S 90-116 type **EASYFIX®** probe, thread ISO G. 1/4" F.



UNI 9507 probe, thread ISO G. 1/4" F.



BS 5682 probe, thread ISO G. 1/4" F.



DIN 13260 probe, thread ISO G. 1/4" F.



SS 875 24 30 probe, thread ISO G. 1/8" M. or ISO G. 1/4" F.



JIS T 7101 probe, thread ISO G. 1/8" M.



SANS 1409 probe, thread ISO G. 1/4" F.



OHMEDA probe, thread ISO G. 1/8" M.

Otherwise, the pressure regulators are always supplied with special oxygen cylinder connections designed and made according to the various national and international standards. The oxygen flowmeter probes support frequent connections and detachments to the medical gas distribution systems, while the pressure regulators must guarantee perfect sealing

and safety, when connected to the gas cylinders. The following pages contain main information regarding the available range of probes with thread connection and hose connection, for mounting on wall rails or floor stands. The pressure regulators cylinder connections too are available in the most popular options. Detailed or specific solutions are available on request.

OXYGEN PROBES WITH HOSE CONNECTION



AFNOR NF-S 90-116 type **EASYFIX®** probe, hose connection Ø 6 mm.



UNI 9507 probe, hose connection Ø 6 mm.



BS 5682 probe, hose connection Ø 6 mm.



DIN 13260 probe, hose connection Ø 6 mm.



SS 875 24 30 probe, hose connection Ø 6 mm.



JIS T 7101 probe, hose connection Ø 6 mm.



SANS 1409 probe, hose connection Ø 6 mm.



OHMEDA probe, hose connection Ø 6 mm.

FLOWMETER OUTLET HOSE CONNECTION

Polypropylene hose connector, three inlet threads (1/4" ISO 3253 F. 9/16" UNF EN 13544-2 F.M12x1.25 F.), outlet tubing Ø 6÷9 mm. (supplied in packs of 5 pieces)



RAIL CLAMPING SYSTEMS FOR OXYGEN FLOWMETERS



Anodized aluminum clamp bracket for rail 50x10 mm, with nipple threaded ISO G. 1/4" F. and hose connector Ø 6 mm.



ABS clamp bracket for rail 30x10 mm, with nipple threaded ISO G. 1/4" F. and hose connector Ø 6 mm.



Anodized aluminum wedge for OHMEDA rail clamp bracket, with nipple threaded ISO G. 1/4" F. and hose connector Ø 6 mm.



Anodized aluminum OHMEDA rail clamp bracket.


STAINLESS STEEL RAIL



Stainless steel rail 30x10 mm, brushed, with spacers and fittings, various lengths.

DIRECTORY - COMPONENTS DETAIL

- 01. Chemical fixings
- 02. Plasterboard fixings
- 03. Rail spacer
- 04. Rail
- 05. Bolt washer
- 06. Bolt

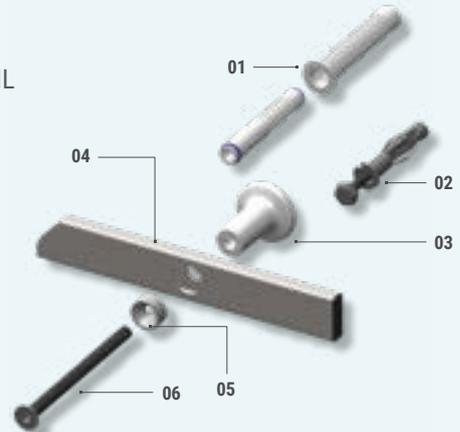

CYLINDER INLET CONNECTIONS FOR OXYGEN PRESSURE REGULATORS



EN 850 (or CGA 870) "pin-index" yoke cylinder connection.



AFNOR NF-E 29-656 cylinder connection.



DIN 477-1 cylinder connection.



UNI 11144 cylinder connection.



BS 341-3 "bull nose" cylinder connection.



CGA 540 cylinder connection.