





Direct reading flowmeters type **RG - RG/L**

The flowmeters type RG-RG/L are instant flow measuring devices, suitable for small and medium flows of liquid and gaseous fluids. The flow measurement can be read with good accuracy on the graduated scale imprinted on the flowmeter body. The measure cone is got directly from the acrylic body.

They can be made with threaded connections. Another feature, besides the ones already mentioned, is:

- possibility of mounting the flowmeter anywhere along the pipeline without need of straight lines or flow correctors.

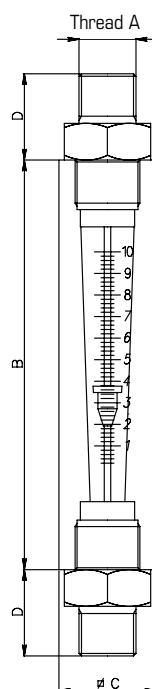

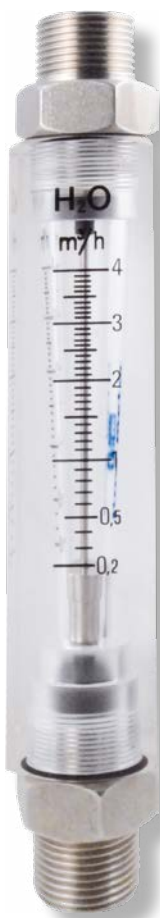

FEATURES

| | |
|--|--------------|
| Accuracy | ± 10% V.F.S. |
| Working max. pressure | 10 bar |
| Working max. temperature | 50° C. |
| Connections made of chrome-plated brass, AISI 316 or PVC | |

ACCESSORIES

Connections for tubing

| TYPE | AIR Maximum flow Nm³/h 1013 mbar | WATER Maximum flow L/h | THREAD A | B | C | D |
|--------|--|------------------------------|----------------------------|-----|----|----|
| RG 1 | 10 | 600 | G 3/8" - G 1/2" | 127 | 35 | 34 |
| RG 1/L | 10 | 600 | G 3/8" - G 1/2" | 200 | 40 | 34 |
| RG 2 | 25 | 2000 | G 1/2" - G 3/4" - G 1" | 160 | 40 | 40 |
| RG 3 | 40 | 4000 | G 3/4" - G 1" | 190 | 45 | 40 |
| RG 3/L | 40 | 4000 | G 3/4" - G 1" | 219 | 60 | 40 |
| RG 4 | 100 | 12000 | G 1" - G 1" 1/4 - G 1" 1/2 | 190 | 60 | 40 |
| RG 4/L | 150 | 12000 | G 1" - G 1" 1/4 - G 1" 1/2 | 254 | 68 | 53 |